



Description: Direct light recessed LED luminaire suitable for installation on plasterboard false ceilings and C series slats with angular edges using the supplied fixing brackets.

Body: steel sheet, painted in matt white (RAL 9003 matt) with thermosetting epoxy powders at 180 ° C, after degreasing, phosphating and washing treatment. The device is supplied complete with accessories for fixing.

Optical group: PMO optic in microprismatic polycarbonate, protected from UV rays for better resistance to atmospheric agents.

Controlled light emission optics with luminance values <3000 cd / m² for emission angles above 65 ° on all planes (UGR <19) and therefore compliant to be installed in environments with the use of video terminals according to UNI EN 12464- 1. Glow-wire test 850 ° C.

Protection degree IP40 (IP20 embedded part).

Wiring: power supply 220-240V 50 / 60Hz with rigid cable, sect. 0.50 mm² and PVC-HT sheath resistant to 90 ° C according to CEI 20-20 standards. Terminal block with maximum allowed cable section 2.5 mm². Insulation class I. Suitable for installation on normally flammable surfaces.

- LED version with electronic driver with fixed output (ON / OFF), included
- DALI LED dimmable version, with DALI dimmable electronic driver included.

Versions with emergency kit (1/3 hours of autonomy) are available on request.


Luminous source: High efficiency LEDs arranged on rigid modules, color rendering CRI> 80 (CRI> 90 available on request), color temperature 3000K and 4000K (selected LED diode 3 MacAdam ellipses in order to guarantee uniform chromaticity).

LED TUNABLE WHITE 2700-6500K versions available on request.


Life of the sources in normal conditions: over 50,000 hours L80 / B10 at Ta = 25 ° C.

Regulations:



- | | | |
|----------------|------------------|---------------------------|
| • EN 61547 | • IEC/TR 62471-2 | • EN 60598-2-13 |
| • EN 55015 | • EN 60061-1 | • EN 62471 (risk class 0) |
| • EN 61000-3-2 | • EN 62031 | • EN 62560 |
| • EN 61000-3-3 | • EN 62493 | • EN 60968 |
| • EN 60529 | • EN 60598-1 | |

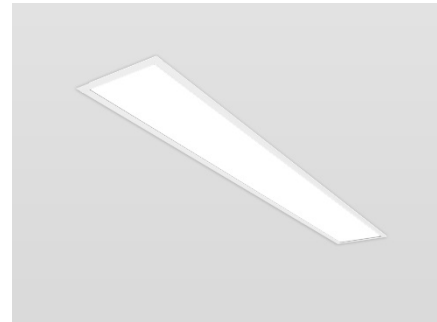

Demonstration image

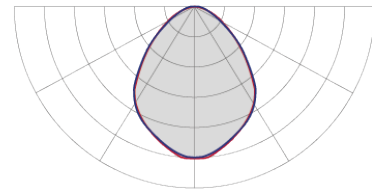

Photometric curve

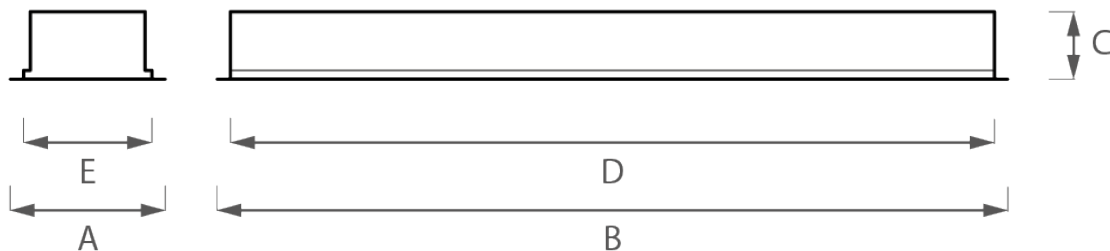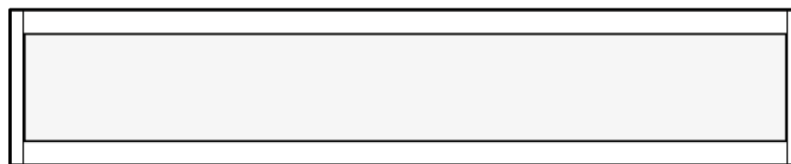



Power [W]	Color temperature [K]	CRI	Effective flux [lm] *	Efficiency [lm/W]	Energetic class	Dimensions [mm]						Code / Wiring	
						A	B	C	D	E	Incasso	LED	LED DALI
13	3000K	>80	1573	121	A++	230	660	90	175	620	177x622	281000173	281000175
13	4000K	>80	1703	131	A++	230	660	90	175	620	177x622	281000174	281000176
26	3000K	>80	3146	121	A++	230	1270	90	175	1230	177x1232	281000189	281000191
26	4000K	>80	3406	131	A++	230	1270	90	175	1230	177x1232	281000190	281000192
33	3000K	>80	3993	121	A++	230	1570	90	175	1530	177x1532	281000253	281000256
33	4000K	>80	4323	131	A++	230	1570	90	175	1530	177x1532	281000254	281000255
24	3000K	>80	2904	121	A++	230	660	90	175	620	177x622	281000181	281000183
24	4000K	>80	3144	131	A++	230	660	90	175	620	177x622	281000182	281000184
48	3000K	>80	5808	121	A++	230	1270	90	175	1230	177x1232	281000197	281000199
48	4000K	>80	6288	131	A++	230	1270	90	175	1230	177x1232	281000198	281000200
60	3000K	>80	7260	121	A++	230	1570	90	175	1530	177x1532	281000260	281000257
60	4000K	>80	7860	131	A++	230	1570	90	175	1530	177x1532	281000259	281000258

* Actual flow may have a tolerance of ± 10%.