



Description: Direct light recessed LED luminaire suitable for installation on false ceiling in slats using the fixing brackets supplied.
Recommended installation for a better aesthetic finish on S30 type slats, S80 and S180.

Body: steel sheet, painted in matt white (RAL 9003 matt) with thermosetting epoxy powders at 180 ° C, after degreasing, phosphating and washing treatment. The device is supplied complete with accessories for fixing.

Optical group: MOT high transmittance opal methacrylate diffuser. It offers excellent light diffusion with high uniformity. Optics resistant to glow-wire test at 650 ° C according to CEI EN 60695-2-11 standards.
Protection degree IP40 (IP20 embedded part).

Wiring: power supply 220-240V 50 / 60Hz with rigid cable, sect. 0.50 mm² and PVC-HT sheath resistant to 90 ° C according to CEI 20-20 standards. Terminal block with maximum allowed cable section 2.5 mm². Insulation class I.
Suitable for installation on normally flammable surfaces.

- LED version with electronic driver with fixed output (ON / OFF), included
- DALI LED dimmable version, with DALI dimmable electronic driver included.

Versions with emergency kit (1/3 hours of autonomy) are available on request.


Luminous source: High efficiency LEDs arranged on rigid modules, color rendering CRI> 80 (CRI> 90 available on request), color temperature 3000K and 4000K (selected LED diode 3 MacAdam ellipses in order to guarantee uniform chromaticity).
LED TUNABLE WHITE 2700-6500K versions available on request.
Life of the sources in normal conditions: over 50,000 hours L80 / B10 at Ta = 25 ° C.

Regulations:



- | | | |
|----------------|------------------|---------------------------|
| • EN 61547 | • IEC/TR 62471-2 | • EN 60598-2-13 |
| • EN 55015 | • EN 60061-1 | • EN 62471 (risk class 0) |
| • EN 61000-3-2 | • EN 62031 | • EN 62560 |
| • EN 61000-3-3 | • EN 62493 | • EN 60968 |
| • EN 60529 | • EN 60598-1 | |



Demonstration image

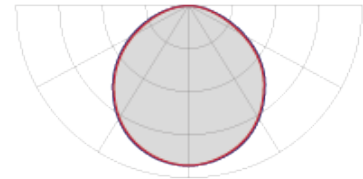

Photometric curve

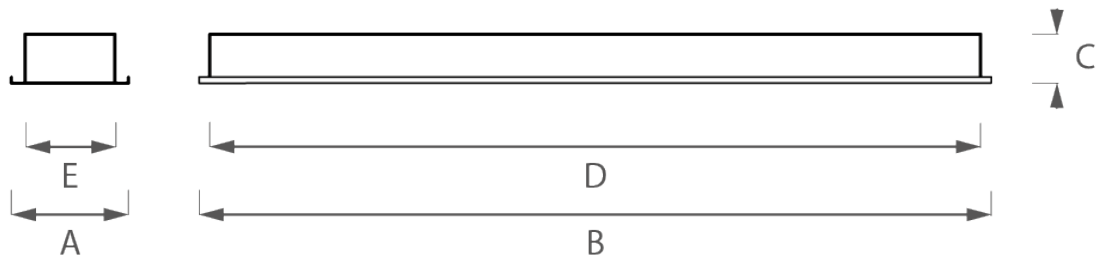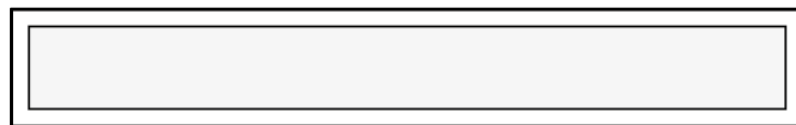



Power [W]	Color temperature [K]	CRI	Effective flux [lm] *	Efficiency [lm/W]	Energetic class	Dimensions [mm]					Code / Wiring	
						A	B	C	D	E	LED	LED DALI
13	3000K	>80	1490	115	A++	180	660	85	610	150	111000013	111000014
13	4000K	>80	1609	124	A++	180	660	85	610	150	111000015	111000016
26	3000K	>80	2984	115	A++	180	1220	85	1170	150	111000017	111000018
26	4000K	>80	3218	124	A++	180	1220	85	1170	150	111000019	111000020
33	3000K	>80	3787	115	A++	180	1780	85	1730	150	111000021	111000022
33	4000K	>80	4084	124	A++	180	1780	85	1730	150	111000023	111000024
24	3000K	>80	2760	115	A++	180	660	85	610	150	111000025	111000026
24	4000K	>80	2976	124	A++	180	660	85	610	150	111000027	111000028
48	3000K	>80	5520	115	A++	180	1220	85	1170	150	111000029	111000030
48	4000K	>80	5952	124	A++	180	1220	85	1170	150	111000031	111000032
60	3000K	>80	6900	115	A++	180	1780	85	1730	150	111000033	111000034
60	4000K	>80	7440	124	A++	180	1780	85	1730	150	111000035	111000036

* Actual flow may have a tolerance of ± 10%.