

Description: Wall recessed steplight luminaire, suitable for 503 masonry boxes, with integrated LED source.

Body: in white die-cast aluminum.

Optical group: VTR diffuser in transparent tempered glass, 38 ° asymmetrical beam.
Degree of protection: IP66.

Wiring: power supply 175-250V 50 / 60Hz.

Insulation class II.


Suitable for installation on normally flammable surfaces.

- LED version with fixed output electronic driver, ON / OFF, included

Luminous source: High efficiency LED, color rendering CRI>80, settable color temperature 3000K / 4000K / 6000K, duration> 50.000 hours at Ta = 25 ° C.





Demonstration image



Photometric curve

Regulations: appliance complies with the following standards:

- EN 61547
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 60529
- IEC/TR 62471-2
- EN 60061-1
- EN 62031
- EN 62493
- EN 60598-1
- EN 60598-2-13
- EN 62471 (class risk 0)
- EN 62560
- EN 60968

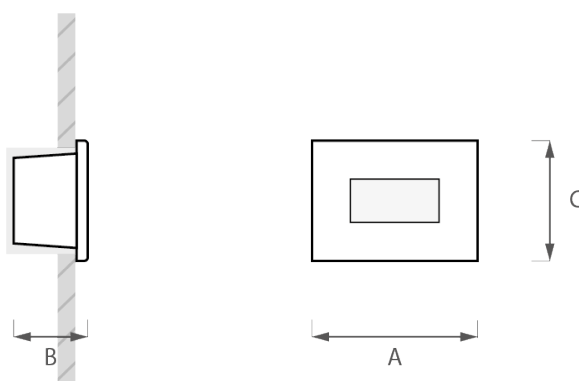

Power [W]	Color temperature [K]	CRI	Effective flux [lm] *	Efficiency [lm/W]	Energetic class	Dimensions [mm]				Code / Wiring	
						A	B	C	Recessed	Weight	LED
3	3000/4000/6000	>80	200	66	A+	115	81	50	87,5x53x55	0,30	900000638

* Actual flow may have a tolerance of ± 10%.