



**Description:** stand-alone **emergency lighting fitting**, suitable for surface-mounted or recessed installation (with accessory to be ordered separately).

**Body:** unbreakable and self-extinguishing UV-stabilized white polycarbonate body.

**Optical group:** **Transparent polycarbonate** diffuser with smooth, unbreakable and self-extinguishing dust-proof surface, stabilized against **UV rays**.

Signal pictograms available on request (to be ordered separately).

Protection degree **IP22**.

**Wiring:** Feeding at 220-240V 0/50/60Hz, battery Ni-Cd 3,6V included. Insulation class II. Suitable for installation on flammable surfaces.





- **CEM-SE** version: non-maintained (the fitting only lights up when there is a power failure). Autonomy 1 hour or 3 hours, battery recharge time 24 hours.
- **CEM-SE/SA** version: (possibility of selecting the operation of the fitting in SE mode - emergency only - or SA - always on). Autonomy 1 hour or 3 hours, battery recharge time 24 hours.
- **AUTOTEST (CEM-SE/SA.AT)** version: Autonomy 1 hour or 3 hours, battery recharge time 12 hours. Two types of tests are performed automatically:  
**Test 1** (performed monthly): Check the operation of the emergency regime for a duration of 5 minutes. Check the battery discharge current. Check the minimum battery voltage.  
**Test 2** (performed annually): Check the functioning of the emergency regime for the entire duration of the autonomy. Check the battery discharge current. Check the minimum battery voltage.

**Light source:**

High efficiency LED modules, colour temperature 6000K, recommended ambient temperature: between 0°C and +40°C.

**Regulations:** luminaire in conformity with:

- EN 60598, electrical safety
- EN 55015, EN 61000, electromagnetic compatibility
- EN 60529, protection degree
- EN 1838, emergency lighting
- EN 61347, electrical feeding

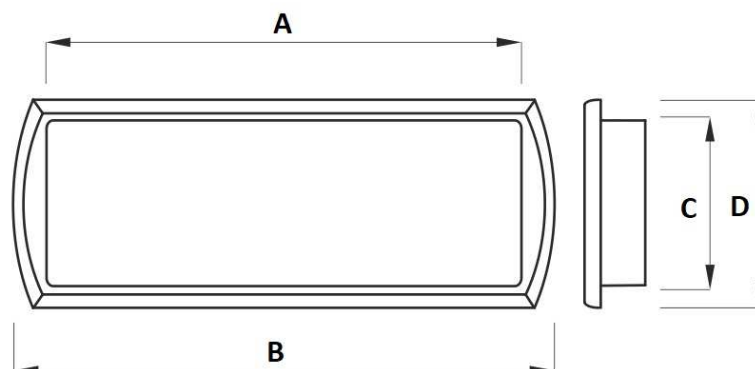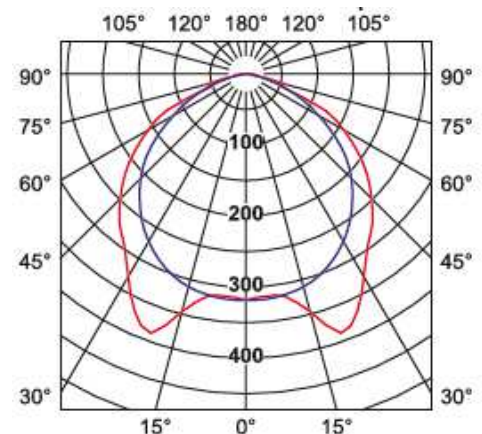

W	Source	Net lumen output [lumen]	Dimensions [mm]			
			A	B	C	D
1	LED	120	323	350	118	144
2	LED	230	323	350	118	144
3	LED	340	323	350	118	144

Codes /Wirings			
CEM-SE AUT.1H	CEM-SE/SA AUT.1H	CEM-SE AUT.3H	CEM-SE/SA AUT.3H
395000019	395000009	395000020	395000012
-	395000010	-	395000013
-	395000011	-	395000014

W	Source	Net lumen output [lumen]	Dimensions [mm]			
			A	B	C	D
1	LED	120	323	350	118	144
2	LED	230	323	350	118	144
3	LED	340	323	350	118	144

Codes /Wirings			
CEM-SE/SA.AT AUT.1H	CEM-SE/SA.AT AUT.3H	-	-
395000006	395000015	-	-
395000007	395000016	-	-
395000008	395000017	-	-