

Description: direct light luminaire for LED source, suitable for recessed installation into:

- "clip-in" false ceilings with 600x600mm or 600x1200mm metal tiles with concealed structure;
- plasterboard false ceilings, installation "from below". Installation using fixing brackets supplied.

Body: sheet steel body powder coated with white (RAL9003 opaque) epoxy powders thermosetting at 180°C, after degreasing, phosphatizing and washing treatment. Other colors according to the RAL range are available on request.

Optical group: MOT high-transmittance opal methacrylate diffuser. It ensures an optimal lighting diffusion with high uniformity. The diffuser is UV-protected for a better resistance to weathering. In conformity with glow-wire test at 650°C as regulation CEI EN 60695-2-11. Protection degree IP54 (IP20 recessed part).

Wiring: feeding 220-240V 50/60Hz with rigid cable (section 0.50 mm²) and PVC-HT sheathing resistant at 90°C according at CEI 20-20. Terminal board with maximum wire section allowed 2,5 mm². Insulation class I. It is suitable to be installed on normally flammable surfaces.

- LED version with electronic driver (ON/OFF), included.
 - LED DALI dimmable version, digital standard DALI, with electronic driver, included.
- Versions with emergency kit (1/3 hours of autonomy) are available on request.


Luminous source: High efficiency LEDs arranged on rigid modules, colour rendering CRI> 80 (CRI> 90 available on request), colour temperature 3000K and 4000K (LED diodes selected 3 MacAdam ellipses to ensure a perfect uniform chromaticity).

LED TUNABLE WHITE 2700-6500K versions available on request.

Life of the sources in normal conditions: over 50,000 hours L80 / B10 at Ta = 25 ° C.




Demonstration image

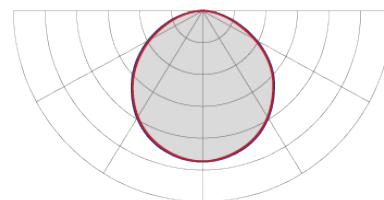

Photometric curve

Regulations: luminaire in conformity with:

- | | | |
|-----------------|------------------|---------------------------|
| • EN 61547 | • IEC/TR 62471-2 | • EN 60598-2-2 |
| • EN 55015 | • EN 60061-1 | • EN 62471 (risk class 0) |
| • EN 61000-3-2 | • EN 62031 | • EN 62560 |
| • EN 61000-3-3 | • EN 62493 | • EN 60968 |
| • EN 61347-1 | • EN 60598-1 | • CEI 76-10 |
| • EN 61347-2-13 | • EN 60598-2-1 | • EN 60529 |

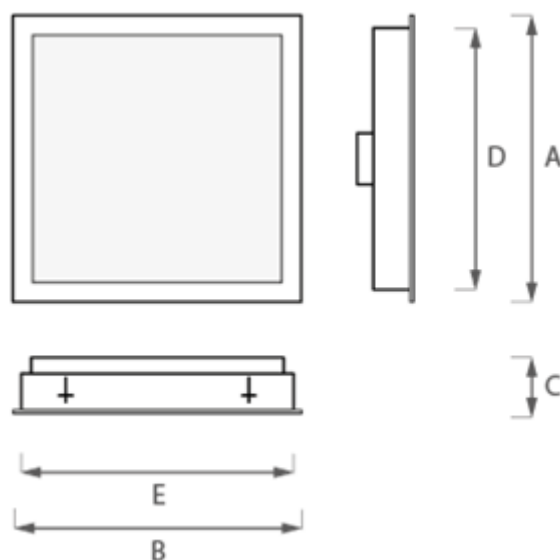

Power [W]	Color temperature [K]	CRI	Effective flux [lm] *	Efficiency [lm/W]	Energetic class	Dimensions [mm]					Code / Wiring	
						A	B	C	D	E	LED	LED DALI
26	3000K	>80	3016	116	A++	600	82	106	550	570	227000132	227000137
26	4000K	>80	3172	122	A++	600	82	106	550	570	227000142	227000147
32	3000K	>80	3712	116	A++	600	82	106	550	570	227000133	227000138
32	4000K	>80	3904	122	A++	600	82	106	550	570	227000143	227000148
38	3000K	>80	4408	116	A++	600	82	106	550	570	227000134	227000139
38	4000K	>80	4636	122	A++	600	82	106	550	570	227000144	227000149
44	3000K	>80	5104	116	A++	600	82	106	550	570	227000135	227000140
44	4000K	>80	5368	122	A++	600	82	106	550	570	227000145	227000150
50	3000K	>80	5800	116	A++	600	82	106	550	570	227000136	227000141
50	4000K	>80	6100	122	A++	600	82	106	550	570	227000146	227000151
38	3000K	>80	4408	116	A++	300	82	106	250	1170	227000152	227000155
38	4000K	>80	4636	122	A++	300	82	106	250	1170	227000158	227000161
44	3000K	>80	5104	116	A++	300	82	106	250	1170	227000153	227000156
44	4000K	>80	5368	122	A++	300	82	106	250	1170	227000159	227000162
50	3000K	>80	5800	116	A++	300	82	106	250	1170	227000154	227000157
50	4000K	>80	6100	122	A++	300	82	106	250	1170	227000160	227000163

* Actual flow may have a tolerance of $\pm 10\%$.