



Description: stand-alone emergency lighting fitting, suitable for wall, or wall recessed installation (accessory to be ordered separately). Viewing distance: 30 m.

Body: unbreakable and self-extinguishing UV-stabilized white polycarbonate body.

Optical group: PMMA polycarbonate **diffuser** with smooth, unbreakable and self-extinguishing dust-proof surface, stabilized against **UV rays**.

Signal pictograms available on request (to be ordered separately).

Protection degree **IP40**.



Wiring: Feeding at 220-240V 0/50/60Hz, battery Ni-Cd 3,6V included. Insulation class II. Suitable for installation on flammable surfaces.


- **CEM-SE/SA** version: (possibility of selecting the operation of the fitting in SE mode - emergency only - or SA - always on). Autonomy 1 hour or 3 hours, battery recharge time 24 hours.
- **AUTOTEST (CEM-SE/SA.AT)** version: Autonomy 1 hour or 3 hours, battery recharge time 12 hours. Two types of tests are performed automatically:
- **Test 1** (performed monthly): Check the operation of the emergency regime for a duration of 5 minutes. Check the battery discharge current. Check the minimum battery voltage.
- **Test 2** (performed annually): Check the functioning of the emergency regime for the entire duration of the autonomy. Check the battery discharge current. Check the minimum battery voltage.

Light source:

High efficiency LED modules, colour temperature 6000K, recommended ambient temperature: between 0°C and +40°C.

Regulations: luminaire in conformity with:

- EN 60598, electrical safety
- EN 55015, EN 61000, electromagnetic compatibility
- EN 60529, protection degree
- EN 1838, emergency lighting
- EN 61347, electrical feeding

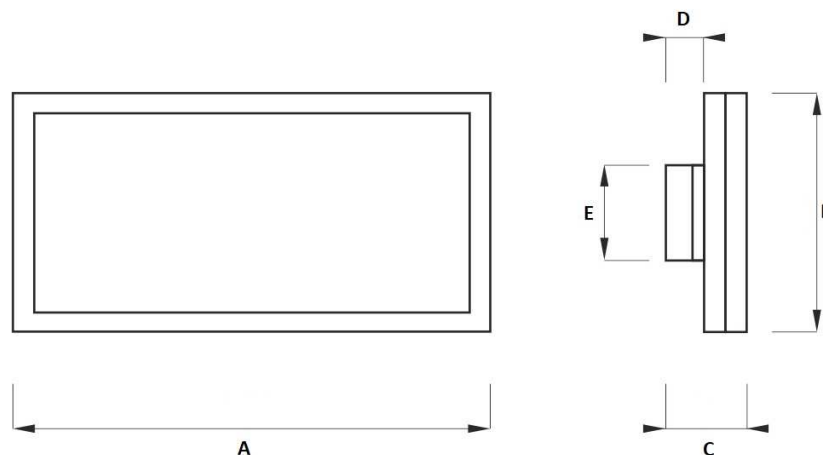



W	Source	Dimensions [mm]				
		A	B	C	D	E
1	LED	337	189	57	37	72
2	LED	337	189	57	37	72

Codes / wirings			
-	CEM-SE/SA AUT.1H	-	CEM-SE/SA AUT.3H
-	400200001	-	400200005
-	400200002	-	400200006

W	Source	Dimensions [mm]				
		A	B	C	D	E
1	LED	337	189	57	37	72
2	LED	337	189	57	37	72

Codes / wirings			
CEM-SE.AT AUT.1H	CEM-SE/SA.AT AUT.3H	-	-
400200003	400200007	-	-
400200004	400200008	-	-

ACCESSORIES

PICTURE	DESCRIPTION	CODE
	Accessory for plasterboard ceiling recessed installation (dim. 368 mm)	KC40020004
	Outer casing for recessed installation on brick (dim. 256x77x41,5 mm)	CF40020004

PICTOGRAMS

- Sticking pictogram dim. 150x300 mm.

Code **PT/B/x** (substitute x with the code that identifies the pictogram).



- Versatile sticking pictogram set dim. 150x300 mm.

Code **PT/B/09**



- Sticking pictogram down arrow dim. 150x150 mm

Code **PT/B/10**

- Sticking pictogram up arrow dim. 150x150 mm

Code **PT/B/11**



- Plexiglass set pictogram dim. 150x300 mm.

Code **PTP/B/x** (substitute x with the code that identifies the pictogram).

