

Description: cylindrical luminaire for wall installation using the fixing brackets supplied or suspended using fixing accessories to be ordered separately. Ideal for environments with a high degree of humidity.

Body: in extruded aluminum complete with aluminum side heads, all painted in matt white (RAL 9003 matt).

Optical group: PTR transparent polycarbonate diffuser. It offers excellent light diffusion with high uniformity. Protection degree **IP54**.


Wiring: 24V dc power supply. Insulation class III.
Lateral conductor exit (from one end cap), length 2 meters.
Suitable for installation on normally flammable surfaces.

- LED version with fixed output remote ON / OFF driver (to be ordered separately).
 - DALI LED version with remote DALI standard dimmable driver (to be ordered separately).
- Version with RGB DMX cCRLuit available on request.

Luminous source: 120LED / m LED strip, color rendering CRI> 90 color temperature 3000K or 4000K, selected LED diode 3 MacAdam ellipses in order to guarantee uniform chromaticity, duration> 40000 hours L70 / B50 at Ta = 25 ° C.
RGB FULL COLORS LED strip available on request.




Demonstration image

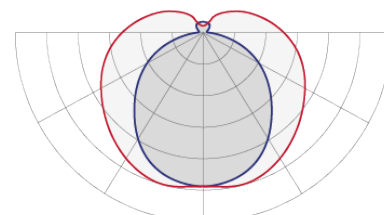

Photometric curve

Regulations: appliance complies with the following standards:

- EN 60598-1
- EN 60598-2-1
- EN 60529
- CEI 76-10
- EN 62031
- EN 61347-2-13
- EN 60598-2-2
- EN 62471 (risk class 0)

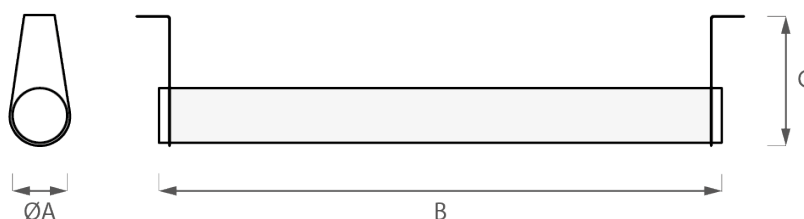

Power [W]	Color temperature [K]	CRI	Effective flux [lm] *	Efficiency [lm/W]	Energetic class	Dimensions [mm]			Codes/Wiring
						A	B	C	LED
9	3000K	>90	521	58	A++	28	600	66	720000012
9	4000K	>90	563	63	A++	28	600	66	720000013
18	3000K	>90	1042	58	A++	28	1160	66	720000014
18	4000K	>80	1125	63	A++	28	1160	66	720000015

* Actual flow may have a tolerance of ± 10%

INSTALLATION ACCESSORIES



COD. KS720

Suspension kit consisting of 2 metal cables with rope clamp and relative small parts (L = 2000mm)
2-piece kit.

			Code	Input voltage [V ; Hz]	Power [W]	Dimensions (L x W x H) [mm]
IP20	ON / OFF		711000013	220-240 ; 50	20	148x45,8x22,5
			711000015	110-240 ; 50/60	50	172,2x63x30
			711000016	110-240 ; 50/60	75	193,2x63x30
			711000042	220-240 ; 50/60	150	180x65,5x31,2
	DALI		711000044	220-240 ; 50/60 220-240 ; 0	35	195x43x30,2
			711000045	220-240 ; 50/60 220-240 ; 0	60	225x43x30,2
			711000046	220-240 ; 50/60 220-240 ; 0	100	295x43x29,8
			711000047	220-240 ; 50/60 220-240 ; 0	150	325x43x29,8
	DMX		711000039	220-240 ; 50/60	55	147x75x39
			711000011	110-240 ; 50/60	100	207x76x35
IP67	ON / OFF		711000010	110-240 ; 50/60 220-240 ; 0	20	118x35x26
			711000018	110-240 ; 50/60 220-240 ; 0	60	162,5x42,5x32
			711000019	110-240 ; 50/60 220-240 ; 0	100	190x52x37
			711000020	110-240 ; 50/60	150	191x63x37,5