



Description: modular system for wall installation with direct and indirect light, consisting of two **extruded aluminum** profiles, usable both individually and in a continuous row. End caps to be ordered separately.

Body: 6060 T5 alloy **aluminum** profile, painted in **“dry” white** color with thermosetting epoxy powders at 180 ° C, after degreasing, phosphating and washing treatment. Other colors according to the RAL range are available on request.
Supplied without heads and installation accessories (to be ordered separately).

Optical unit: PST optic with **satin opal polycarbonate** diffuser, with a smooth finish, ideal for uniform distribution. Optic snap fastened to the luminaire body without the use of tools. Glow-wire test 850 ° C.
Degree of protection **IP40**.

Wiring: power supply 220-240V 50 / 60Hz with rigid cable, sect. 0.50 mm² and PVC-HT sheath resistant to 90 ° C according to CEI 20-20 standards. Terminal block with maximum allowed cable section 2.5 mm². Insulation class I. Suitable for installation on normally flammable surfaces.

- **LED** version with electronic driver with fixed output (ON / OFF), included.
- **LED DALI** version with standard DALI digital dimmable electronic driver, included.

Versions with emergency kit (1/3 hours of autonomy) are available on request.

Luminous source:




Durata delle sorgenti in condizioni normali: oltre **50.000** ore **L80/B10** a Ta=25°C.
High efficiency LEDs arranged on rigid modules, color rendering CRI> 80 (CRI> 90 available on request), color temperature **3000K** and **4000K** (LED diode selected 3 MacAdam ellipses in order to guarantee uniform chromaticity).

RGB and **TUNABLE WHITE 2700-6500K** LED versions available on request.

Life of the sources in normal conditions: **over 50,000 hours L80 / B10 at Ta = 25 ° C**.

Compliance: appliance complies with the following regulations

- | | | |
|----------------|------------------|---------------------------|
| • EN 61547 | • IEC/TR 62471-2 | • EN 60598-2-13 |
| • EN 55015 | • EN 60061-1 | • EN 62471 (0 risk group) |
| • EN 61000-3-2 | • EN 62031 | • EN 62560 |
| • EN 61000-3-3 | • EN 62493 | • EN 60968 |
| • EN 60529 | • EN 60598-1 | |

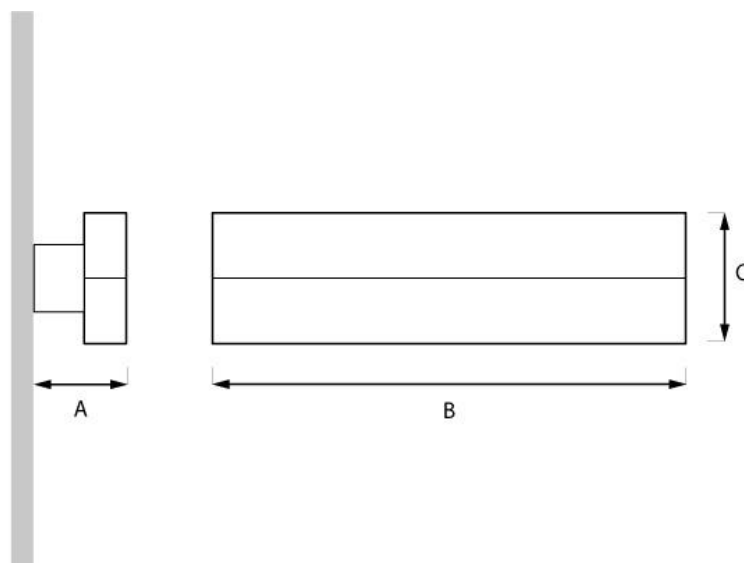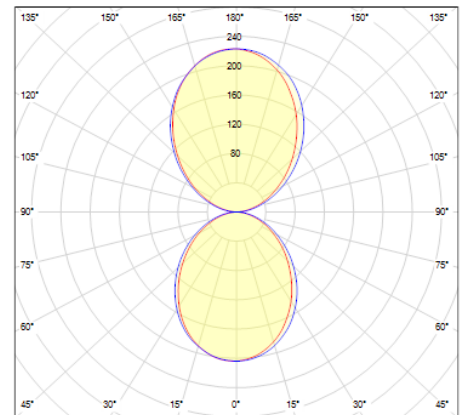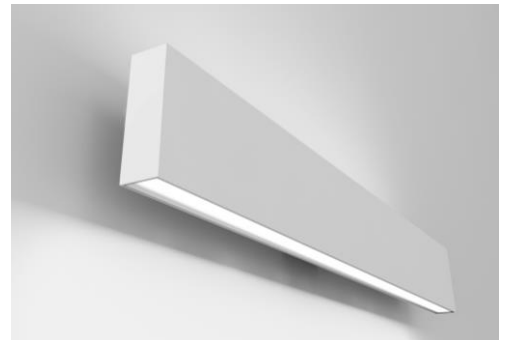

W	Color Temperature	IRC	Effective flux [lm]*	Efficiency [lm/W]	Energetic class	Dimensions** [mm]			Codes	
						A	B	C	LED	LED DALI
13+13	3000	>80	2210	85	A++	128	561	156	663000552	663000553
13+13	4000	>80	2366	91	A++	128	561	156	663000559	663000560
20+20	3000	>80	3400	85	A++	128	841	156	663000554	663000555
20+20	4000	>80	3640	91	A++	128	841	156	663000562	663000563
26+26	3000	>80	4420	85	A++	128	1121	156	663000556	663000557
26+26	4000	>80	4732	91	A++	128	1121	156	663000564	663000565
39+39	3000	>80	6630	85	A++	128	1681	156	663000558	663000561
39+39	4000	>80	7098	91	A++	128	1681	156	663000566	663000567

* Actual flow may have a tolerance of $\pm 10\%$.

** Dimensions relative to the module only - to add the headers at the beginning and end of the line (+2 mm each).

INSTALLATION ACCESSOIRES



COD. TC663004

End caps in aluminum painted in DRY WHITE color.
Kit of 2 pcs.